

Multi-Cards, Proximity Reader

Model: 6609P-4



6609P-4

(Proximity Reader: Awid/EM/Hid)

Features

- Smooth attractive design, with all-weather
- Output: RS485.
- Dual color LED: Blue/Green.
- Green connector for wiring.
- Supports Multi Prox Cards:
 - ✓ AWID
 - ✓ EM, 2308
 - ✓ HID
 - ✓ KK: KK234, KK250
- 6609P is manufactured in KEYKING's ISO:9001 registered facility.

Description

This superior quality Proximity reader is rugged, weather-resistant and attractive in design. The product was designed to reduce stock levels. Blue backlit LED assist operation in low or no light environment. With the internal sounder, 6609P provides superior accessibility.


6609P can be easily disinfected in areas where hygiene is important, and has an exceptionally long life due to no moving parts. The unit resists the elements such as glue, oil, rain, ice, snow. Ideal for hospitals, industrial and commercial application.

6609P-4 is very good for elevator controller, because the distance can be up to 1200 meters.

This dual-application product has advanced reader features for wide compatibility with different controller types including multiple RFID card transmission formats, LED & Buzzer control.

Specifications

- Maximum read range: 150mm (6.00 in.)
- RS485 distance to panel: $\leq 1200m$
- Modulation: ASK at 125 kHz
- Supports RS485 Output:
 - ✓ AWID
 - ✓ EM, 2308
 - ✓ HID
 - ✓ KKID
- Operating Voltage: 7-12VDC
- Operating Current: $\leq 100mA$
- Standby Current: $\leq 50mA$
- Working Temperature: -30°C to 65°C (-22°F to 150°F)
- Operating Humidity: 0 to 95%
- LED Control Input: Dry Contact, Normally Open
- Buzzer Control Input: Dry Contact, Normally Open
- Dimensions: 86mm L x 86mm W x 21mm D (6.59 in. x 6.59 in. x 0.83 in.)
- Weight: 290 g (0.63 lbs)

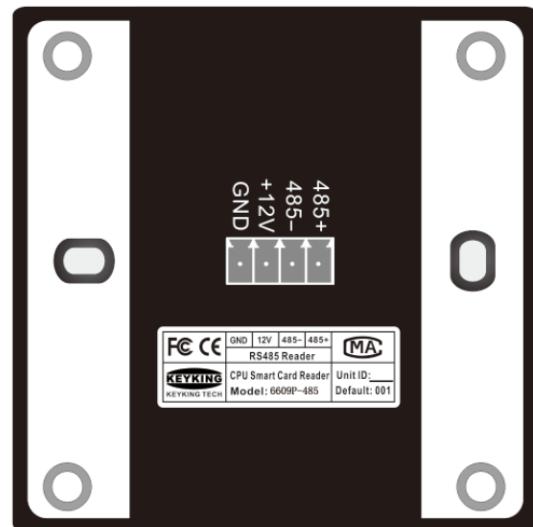

SZ KEYKING TECH LIMITED

Add: 5F, Keyking Building, 12th, Shangwei Industrial No.1 Road, Zhangkengjing, Guanhu Town, Longhua New District, Shenzhen, China, 518110.

Tel: (86)755-8829 9009 Fax: (86)755-8829 9004 Website: www.kevking.net